



CONSUMER ITEM	LENGTH (mm)
ENOVA - EC-H1-7	7000 ± 50

- ELECTRICAL TEST:
1. 100% OPEN SHORT MIS WIRE TEST
 2. CONTACT RESISTANCE: 5 OHM MAX
 3. INSULATION RESISTANCE: 10M OHM MIN
 4. HI-POT TEST: DC 300V/10ms
 5. PASS 4K@60HZ TEST

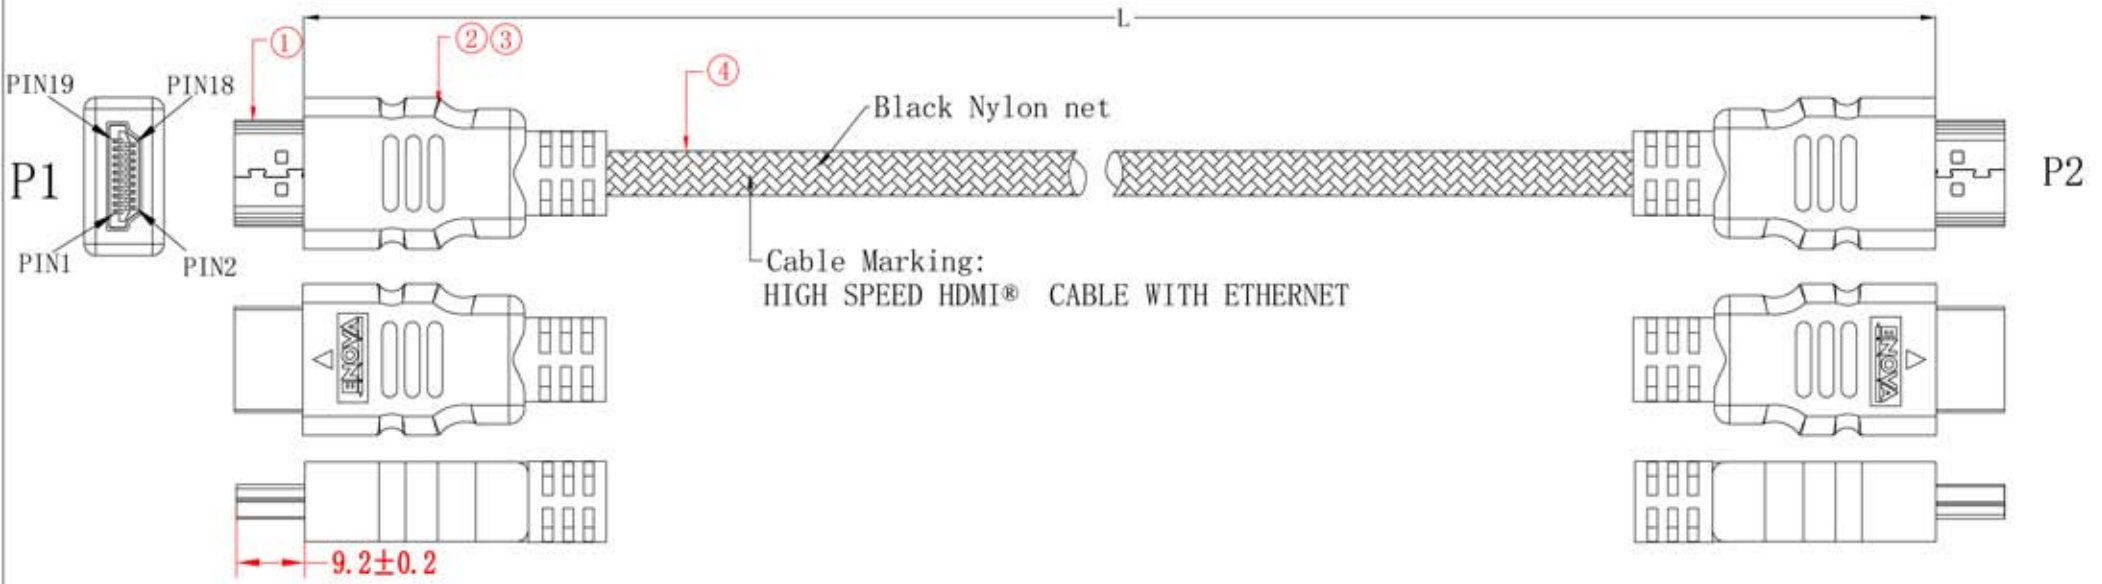

PIN Assignment

P1 HDMI AM	P2 HDMI AM
1	1
3	3
5	5
4	4
6	6
2	2
7	7
9	9
11	11
10	10
12	12
8	8
14	14
19	19
17	17
13	13
15	15
16	16
18	18
SHELL	SHELL

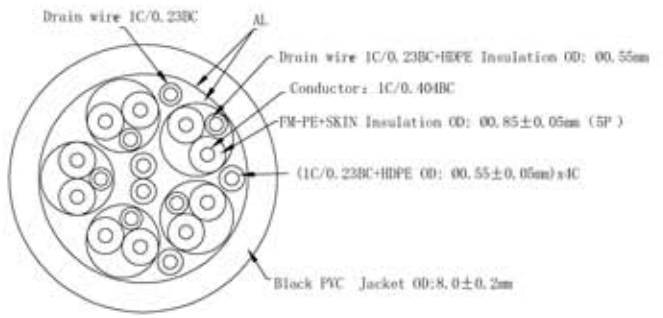

④	CABLE	2.0V HDMI 26-30AWG BC 19+1 [(1C/0.404BC*1P+D1C/0.23BC+AL)*5P+1C/0.23BC*4C +D1C/0.23BC]+AL+BLACK PVC OD : 8.0 ± 0.2mm	m
③	MODEL	Black 45P PVC	g
②	MODEL	PE, Nature color	g
①	plug	HDMI AM 19P PIN:G/F, SHELL:Gold plated	2PCS
NO.	PART NAME	DESCRIPTION	UNIT

				DESCRIPTION	FINISHED PRODUCT'S FIGURE	SCALE	FIT	UNITS: MM	1RD ANGLE
				MODEL NO.	ENOVA - EC-H1-7	△			
APPROVED	CHECKED	DRAWING	DESIGNED	DRAWING NO.	△				
		HENRY	L. H. R	FINISHING MATERIAL	△	2020/08/07		A1	
					SYM	DATE		REVISION	